

MONITOR & CONTROL BY WEB/APP



Enlarged display.
Directly monitor
the accounts
of the next
level of users.



Server in the US




SUNSPEC
ALLIANCE





AC COUPLING IS READY


Hook up max. 72kW on existing on-grid system.

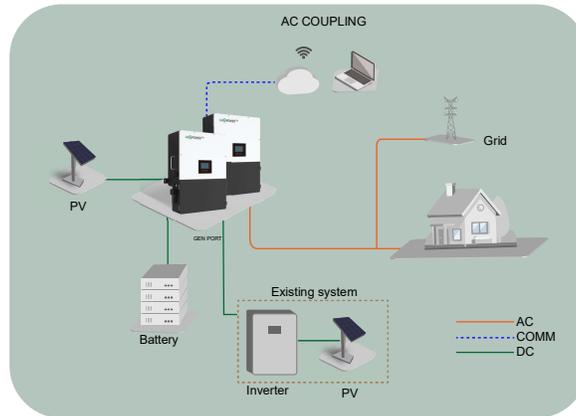


Monitoring new on-grid system data on Luxpower APP/WEB.



PARALLEL FUNCTION IS READY

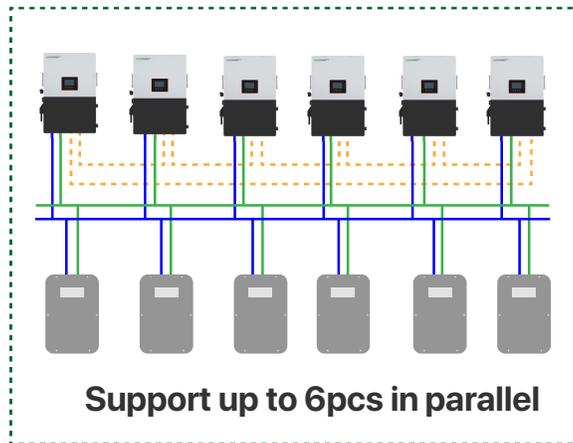

All data shown in the master control unit.

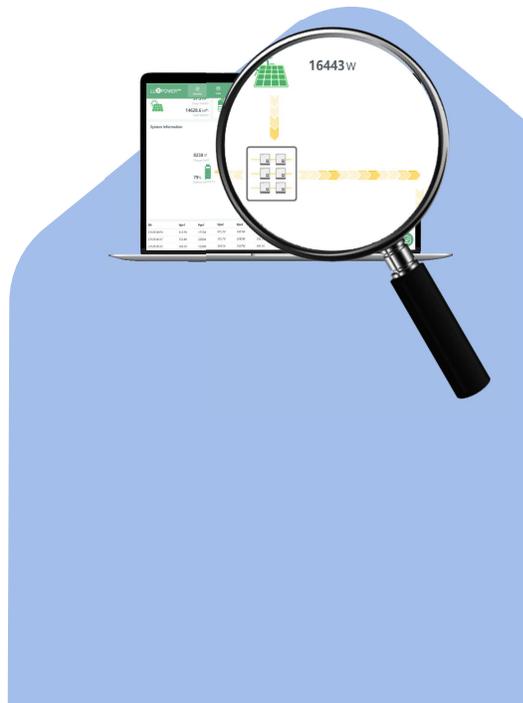


LU X POWER^{TEK}

INSTALLER FRIENDLY DESIGN



- ✓ Battery breakers integrated
- ✓ Much bigger wiring space
- ✓ Load breakers integrated
- ✓ 200A passthrough

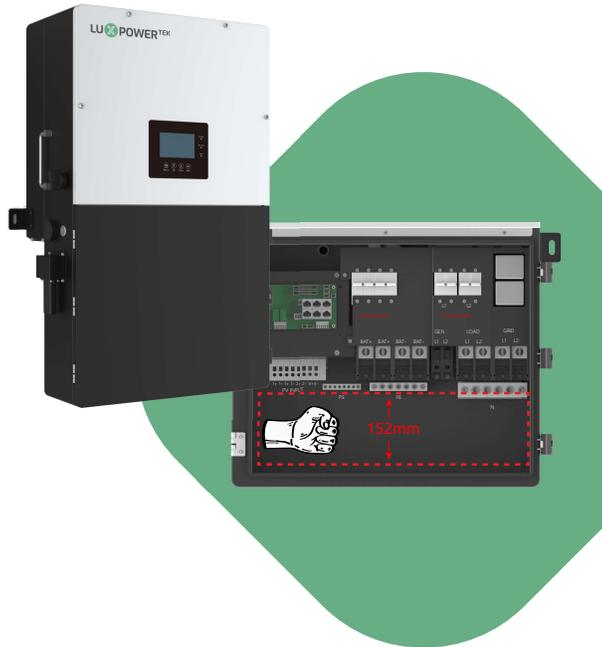

REAL 12kW HYBRID INVERTER


Why they also call me 18k?

*PV input: 18kW/3 MPPT inputs

*UPS/Inverter Output(Measured values): 12kW

*200A Passthrough Current

---Max. 45kW output

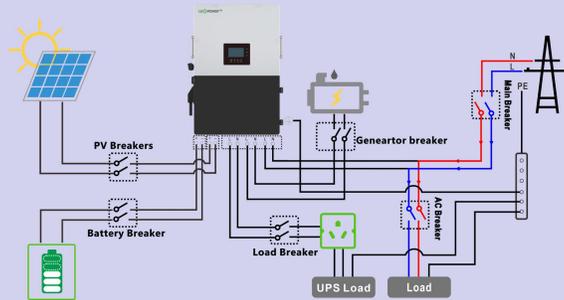



CERTIFICATIONS WE HAVE




Anything else do you expect here?

Let us know.

Email: usa@luxpowertek.com

CONNECTING GENERATORS

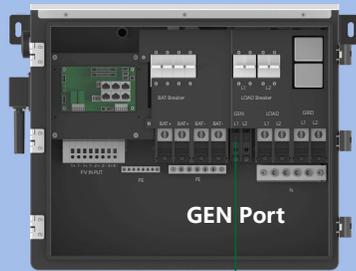

Generator (Min. 6kVA):
Max. input current: 100A
Use gen port for smart loads

