



Series	5000	Warranty	5 Years
Volts	8	BCI	SPEC
Cells	4	Plates/Cell	25
Terminal Type	Flag		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18		

### Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25 V/cell @ 25°C (77°F)
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

### Capacity

Cold Crank Amps (CCA) 0°F / -17°C	2090
Marine Crank Amps (MCA) 32°F / 0°C	2612
Reserve Capacity (RC @ 25A)	2047 Minutes
Reserve Capacity (RC @ 75A)	682 Minutes

Hour Rate	Capacity / AMP Hour	Current / AMPS
@ 100 Hour Rate	<b>1100 AH</b>	<b>11.00 A</b>
@ 72 Hour Rate	<b>1040 AH</b>	<b>14.45 A</b>
@ 50 Hour Rate	<b>985 AH</b>	<b>19.70 A</b>
@ 20 Hour Rate	<b>853 AH</b>	<b>42.64 A</b>
@ 15 Hour Rate	<b>793 AH</b>	<b>52.87 A</b>
@ 10 Hour Rate	<b>759 AH</b>	<b>75.90 A</b>
@ 8 Hour Rate	<b>733 AH</b>	<b>91.68 A</b>
@ 5 Hour Rate	<b>682 AH</b>	<b>136.45 A</b>
@ 1 Hour Rate	<b>384 AH</b>	<b>383.76 A</b>

Ampere hour capacity ratings based on specific gravity of 1.280 at 25°C (77°F). Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

### Specifications




SAI GLOBAL  
ISO 9001  
Quality

Weight	192 kg	423.5 lbs
Length	71.8 cm	28.25"
Width	28.6 cm	11.25"
Height Inc. Term.	46.4 cm	18.25"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Electrolyte Reserve	95 mm	3.75"
Container (Inner)	Polypropylene	
Cover (Inner)	Polypropylene - heat sealed to inner container	
Container (Outer)	High Density Polyethylene	
Cover (Outer)	High Density Polyethylene snap fit to outer container	
Handles	Molded	

### Cycle Life vs. Depth of Discharge

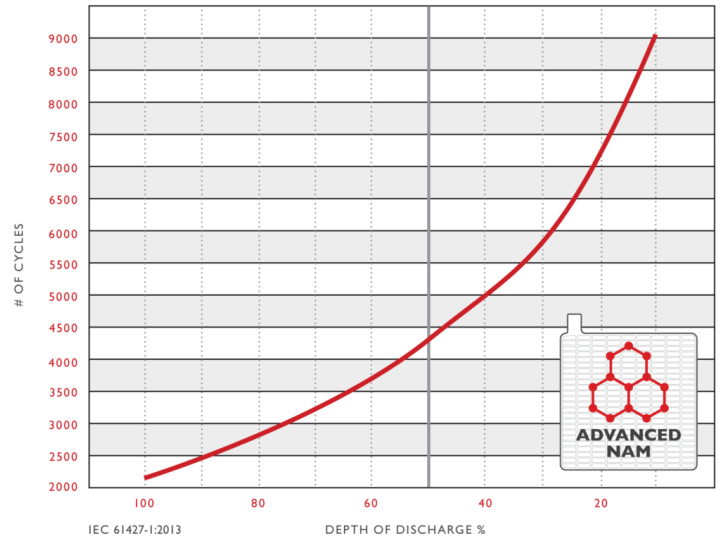

### Voltage vs. Depth of Discharge

